

ETD/ETA/ETS SERIES TRI-STATE TYPE



■ FEATURES


- With three state (1, open, 0) setting function, especially suitable for encoding/decoding of tri-state encoder/decoder integrated circuit to obtain more security codes than traditional two-state (1,0) operation. For instance, 9 bits with tri-state gets 19,683 (3^9) codes, while two-state has 512 (2^9) codes, gains 38 times more codes with a ECE tri-state DIP Switch.
- Bottom sealed to ensure free of flux immersion during wave soldering.
- All plastics are UL 94V-0 grade fire retardant.
- Gold plated contact to ensure low contact resistance and Tin plated terminals to prevent contamination during soldering.
- Twin contacts designed to ensure stable contact.
- Ideal for coding tele-communication, transceiving, remote control and burglar alarm systems which use integrated circuits with tri-state coding systems.

■ SPECIFICATIONS


1.ELECTRICAL

● Contact rating	
switching	25mA, 24VDC
non-switching	100mA
● Contact resistance	
initial	50mΩ Max.
after life test	100mΩ Max.
● Insulation resistance	1000MΩ Min. at 100VDC
● Dielectric strength	500VDC Min. for 60 seconds
● Capacitance between adjacent switches 5pF Max.	


2.MECHANICAL and ENVIRONMENTAL

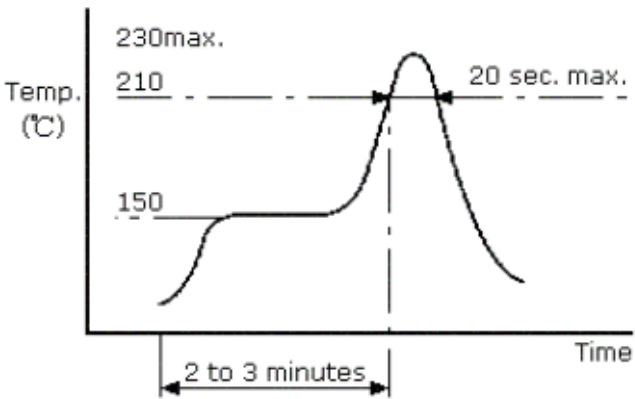● Temperature rating	
operating	-25°C to +70°C
storage	-40°C to +85°C
● Operation force	800g Max.
● Mechanical life	2000 operations
● Humidity	95% RH, 40°C for 96 Hrs.
● Vibration	Per MIL-STD-202F, method 204D.
● Solderability (for through hole type)	after flux 230±5°C for 5±0.5 seconds, 95% coverage
● Resistance to soldering heat (for through hole type)	260±5°C for 5±1 seconds.
● Reflow soldering heat for SMT type (reference only)	

■ PART NUMBERING SYSTEM

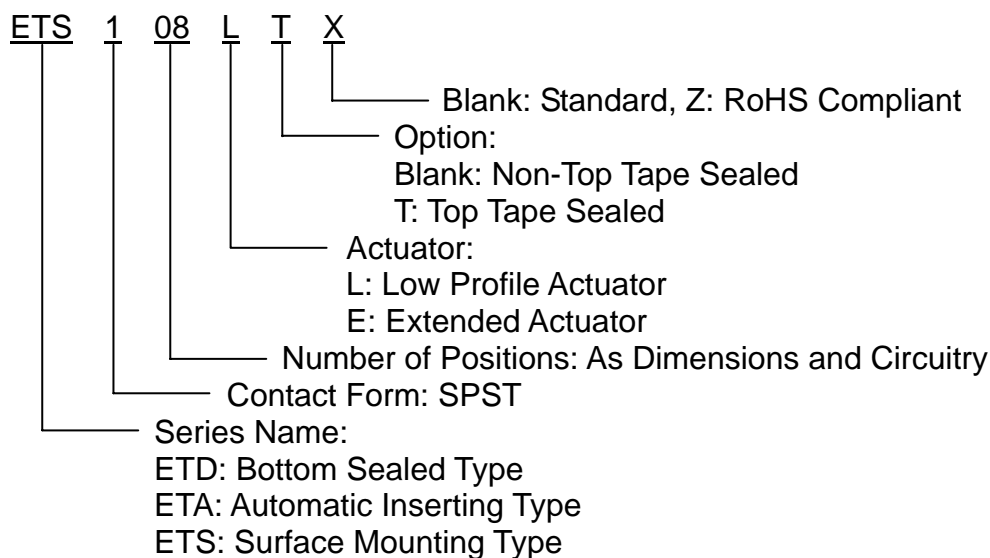

CONSTRUCTION

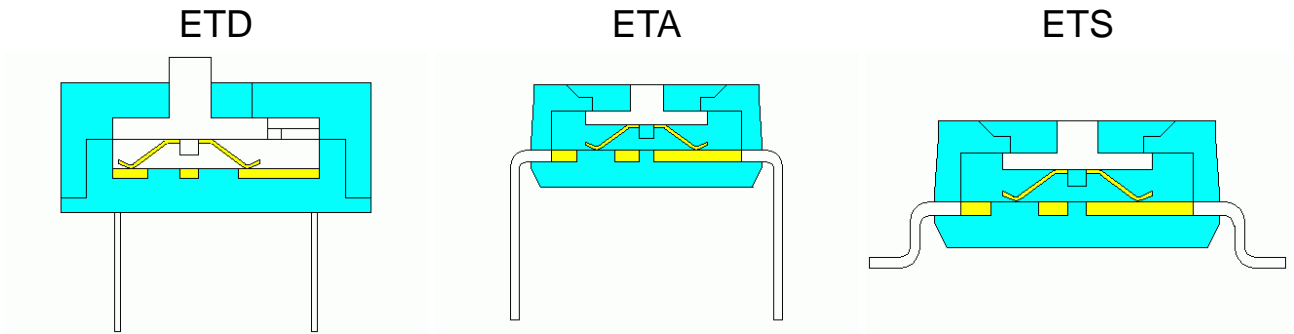


OPTIONS

1. Tape Sealed



2. Reverse P.C.B. LAYOUT available




DIMENSIONS AND CIRCUITRY


DIMENSION A

Positions	4	5	6	7	8	9	10
A	15.30 (0.602)	17.84 (0.702)	20.38 (0.802)	22.92 (0.902)	25.46 (1.002)	28.00 (1.102)	30.54 (1.202)


Unit: mm(inch)

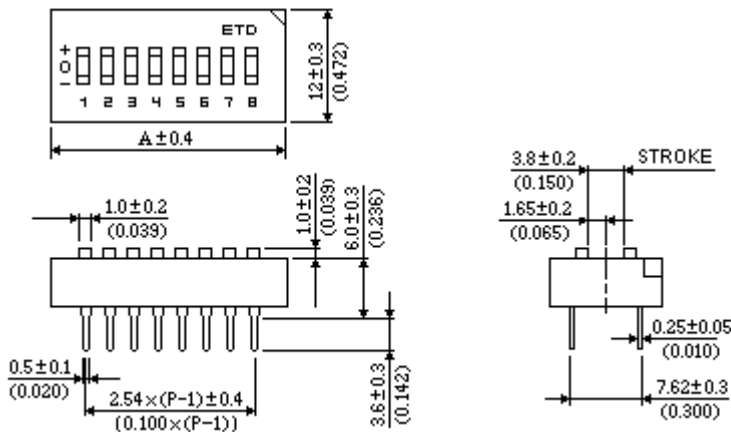

CIRCUIT DIAGRAM



P.C.B. LAYOUT (TOP VIEW)





DIMENSION A


ETA

Positions	2	3	4	5	6	7	8	9	10	12
A	6.88 (0.263)	9.22 (0.363)	11.76 (0.463)	14.30 (0.563)	16.84 (0.663)	19.38 (0.763)	21.92 (0.863)	24.46 (0.963)	27.00 (1.063)	32.08 (1.263)


Unit:mm(inch)

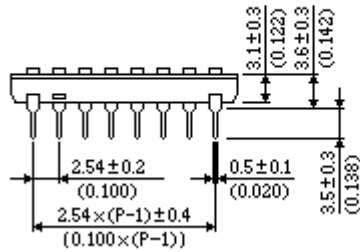


(L) TYPE




(E) TYPE



CIRCUIT DIAGRAM



P.C.B. LAYOUT (TOP VIEW)





DIMENSION A


ETS

Positions	2	3	4	5	6	7	8	9	10	12
A	6.88 (0.263)	9.22 (0.363)	11.76 (0.463)	14.30 (0.563)	16.84 (0.663)	19.38 (0.763)	21.92 (0.863)	24.46 (0.963)	27.00 (1.063)	32.08 (1.263)


Unit:mm(inch)

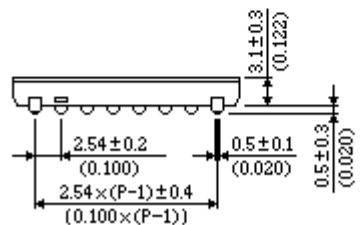


(L) TYPE



(E) TYPE



CIRCUIT DIAGRAM



P.C.B. LAYOUT (TOP VIEW)

