

# endrich news

www.endrich.com

## OUR PRODUCT OF THE MONTH: CROCUS TMR ANGULAR SENSOR CT300




### FEATURES

- Contactless angle measurement from 0° to 360°
- Angular error < 0.6° over full temperature range
- Dual full-bridge resistor network
- Operating magnetic field: 20 mT to 80 mT
- Stable magnetic performance over temperature
- Differential outputs for SIN and COS axes



**CITIZEN HIGH INTENSITY GENERATION 3**

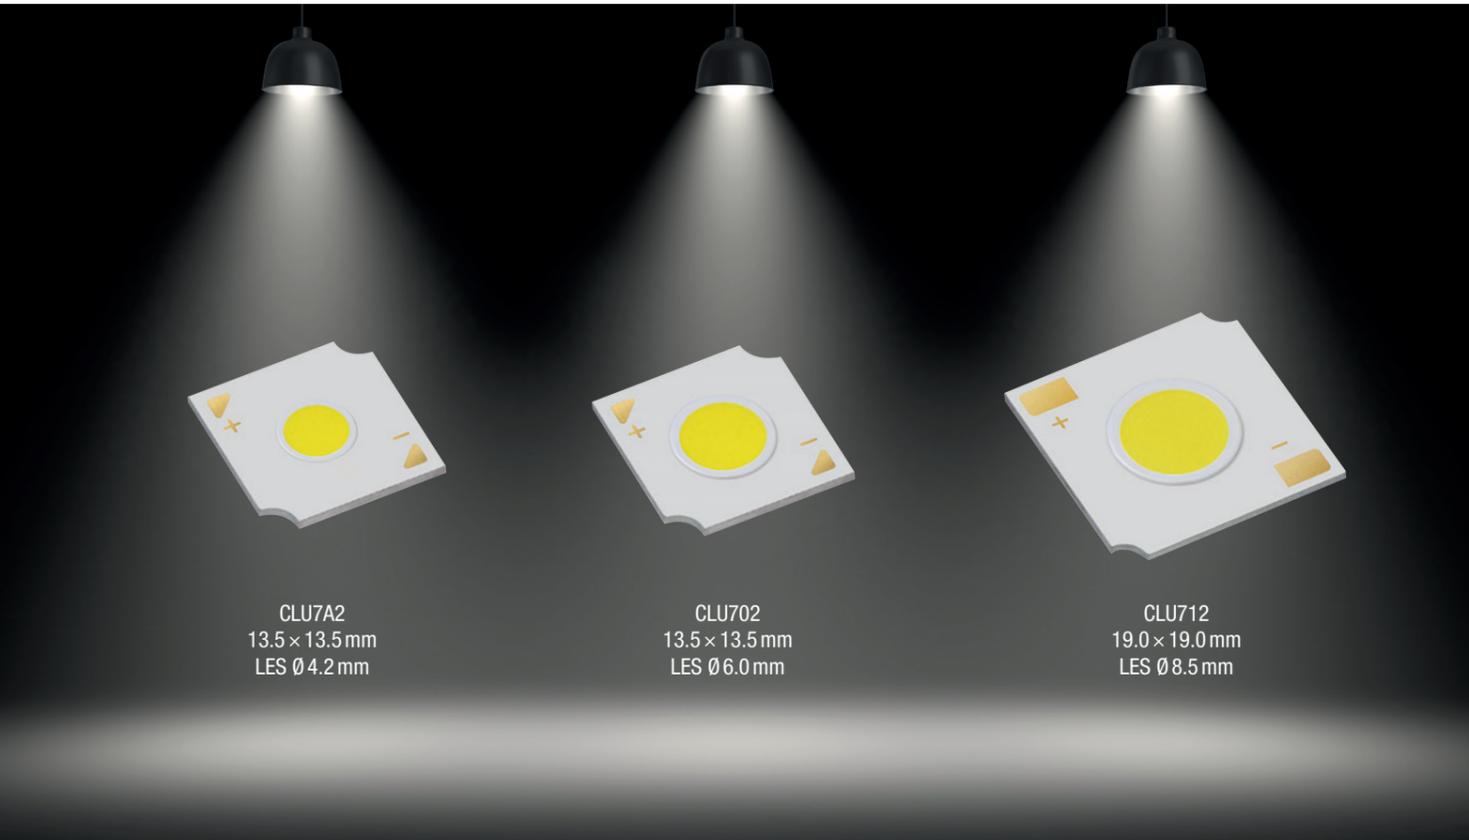

CLU7A2  
13.5 × 13.5 mm  
LES Ø4.2 mm

CLU702  
13.5 × 13.5 mm  
LES Ø6.0 mm

CLU712  
19.0 × 19.0 mm  
LES Ø8.5 mm

Our supplier Citizen Electronics developed a new COB generation CLU7x2 for high density application with narrow beam angle. With the new 4,2mm LES we are offering the smallest LES on the COB market. The high intensity COBs will be also available with CRI 97. All available holders which could be used for CLU7x1 can be also used for CLU7x2. Pad-layout size of CLU712 is changed that all holders for CLU038 and CLU711 could be also used for this type.

**APPLICATIONS**

- Spotlight with narrow beam angle
- Truck light
- Downlight

**ADDITIONAL INFORMATION**


- Ra 97 will be also added to the line-up
- 5 Years Warranty
- Samples are available
- UL certification available
- Mac Adam Step 3 Binning

**CITIZEN HIGH INTENSITY GENERATION 3**

Product code	Electro-Optical Characteristics								Absolute Max. Rating
	Ra	CCT	Forward Current	Voltage Typ.	Input power typ.	Luminous flux Typ.	Luminous efficacy Typ.	Thermal resistance Rj-C	Forward current
CLU7A2-1201C9-273M2R1	80 Min.	2,700 K	175 mA	35.6 V	6.2 W	745 lm	120 lm/W	3.0 °C/W	300 mA
CLU7A2-1201C9-303M2R1	80 Min.	3,000 K	175 mA	35.6 V	6.2 W	771 lm	124 lm/W	3.0 °C/W	300 mA
CLU7A2-1201C9-403M2R1	80 Min.	4,000 K	175 mA	35.6 V	6.2 W	810 lm	130 lm/W	3.0 °C/W	300 mA
CLU7A2-1201C9-273H5R2	90 Min.	2,700 K	175 mA	35.6 V	6.2 W	625 lm	100 lm/W	3.0 °C/W	300 mA
CLU7A2-1201C9-303H5R2	90 Min.	3,000 K	175 mA	35.6 V	6.2 W	660 lm	106 lm/W	3.0 °C/W	300 mA
CLU7A2-1201C9-403H5R2	90 Min.	4,000 K	175 mA	35.6 V	6.2 W	716 lm	115 lm/W	3.0 °C/W	300 mA
CLU702-1202C9-273M2R1	80 Min.	2,700 K	350 mA	35.6 V	12.5 W	1,518 lm	122 lm/W	1.6 °C/W	600 mA
CLU702-1202C9-303M2R1	80 Min.	3,000 K	350 mA	35.6 V	12.5 W	1,576 lm	126 lm/W	1.6 °C/W	600 mA
CLU702-1202C9-403M2R1	80 Min.	4,000 K	350 mA	35.6 V	12.5 W	1,658 lm	133 lm/W	1.6 °C/W	600 mA
CLU702-1202C9-273H5R2	90 Min.	2,700 K	350 mA	35.6 V	12.5 W	1,246 lm	100 lm/W	1.6 °C/W	600 mA
CLU702-1202C9-303H5R2	90 Min.	3,000 K	350 mA	35.6 V	12.5 W	1,342 lm	108 lm/W	1.6 °C/W	600 mA
CLU702-1202C9-403H5R2	90 Min.	4,000 K	350 mA	35.6 V	12.5 W	1,424 lm	114 lm/W	1.6 °C/W	600 mA
CLU712-1204C9-273M2R1	80 Min.	2,700 K	700 mA	35.6 V	24.9 W	3,079 lm	124 lm/W	0.91 °C/W	1,200 mA
CLU712-1204C9-303M2R1	80 Min.	3,000 K	700 mA	35.6 V	24.9 W	3,196 lm	128 lm/W	0.91 °C/W	1,200 mA
CLU712-1204C9-403M2R1	80 Min.	4,000 K	700 mA	35.6 V	24.9 W	3,363 lm	135 lm/W	0.91 °C/W	1,200 mA
CLU712-1204C9-273H5R2	90 Min.	2,700 K	700 mA	35.6 V	24.9 W	2,535 lm	102 lm/W	0.91 °C/W	1,200 mA
CLU712-1204C9-303H5R2	90 Min.	3,000 K	700 mA	35.6 V	24.9 W	2,701 lm	108 lm/W	0.91 °C/W	1,200 mA
CLU712-1204C9-403H5R2	90 Min.	4,000 K	700 mA	35.6 V	24.9 W	2,891 lm	116 lm/W	0.91 °C/W	1,200 mA

## DOPPLER SENSOR MODULE SERIES NJR4266

HAVE A LOOK

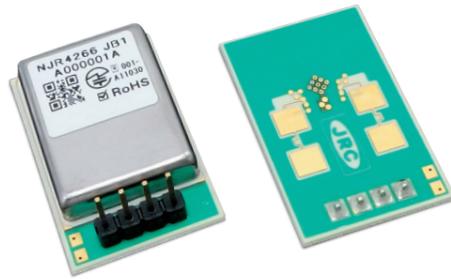

Intelligent low speed K-band motion sensor for short distance. NJR4266 is an intelligent human motion sensor module series that can detect objects moving at low speed like a pedestrian in a short distance range (approx. 7 to 14 m). It incorporates a 24 GHz band microwave circuit, antenna, signal processing circuit and MCU in a low profile package of only 17.2 mm x 27.3 mm x 5.1 mm. Signal processing technology greatly reduces false detection of environmental noise and achieves stable detection results.

It also reduces power consumption by sensitivity setting. The NJR4266 series is available in multiple antenna versions so that the users can select the ideal detection angle best suitable for their specific application. Moreover, the user can select between UART and stand alone version (digital output / analog range setting) as interface type.

### FEATURES

- Motion sensor based on 24 Ghz microwave doppler effect
- Antenna, microwave RF circuit, IF amplifier, MCU and voltage regulator are integrated in low-profile package (17.2 mm x 27.3 mm x 5.1 mm)
- Low power consumption (intermittent mode 1.9 mA min@3.3 V)
- Sleep mode for power reduction
- Decreasing mutual interference between sensors
- Available in 4 antenna versions to select the optimum detection angle
- Selectable between UART interface or digital output / analog sensitivity setting version
- UART interface version offers identification of direction (approaching and leaving) for moving objects

### APPLICATIONS

- Various control equipment by human sensing
- Lighting sensors
- Safety and security equipment
- Energy saving management
- Entrance and exit management

Product Line-up	CENTER FREQUENCY	REGION
NJR4266Jxx	24.05 ... 24.25 GHz	Japan [MIC Techn. Conf. ARIB STD-T73]
NJR42366F2xx	24.15 ... 24.25 GHz	All of EU regions [RED 2014/53/EU (CE Marking)]
NJR4266F3xx	24.075 ... 24.175 GHz	United States [FCC Part 15.245]


  

Ordering information	ANTENNA PATCH ARRAY	DETECTION RANGE	DETECTION ANGLE	INTERFACE
NJR4266F2C1	TX/RX: 4 x 1	15 m	76°/ 32°	C1: UART
NJR4266F2C2	TX/RX: 4 x 1	15 m	76°/ 32°	C2: Analog Threshold / CMOS Output

Note: As 1x1 type, 4x1 type and 2x2 type are being developed, design values are listed for detection angle and detection distance.

## NEW TVS DIODE ARRAY FOR AUTOMATED FACTORY SENSOR CIRCUIT PROTECTION

HAVE A LOOK

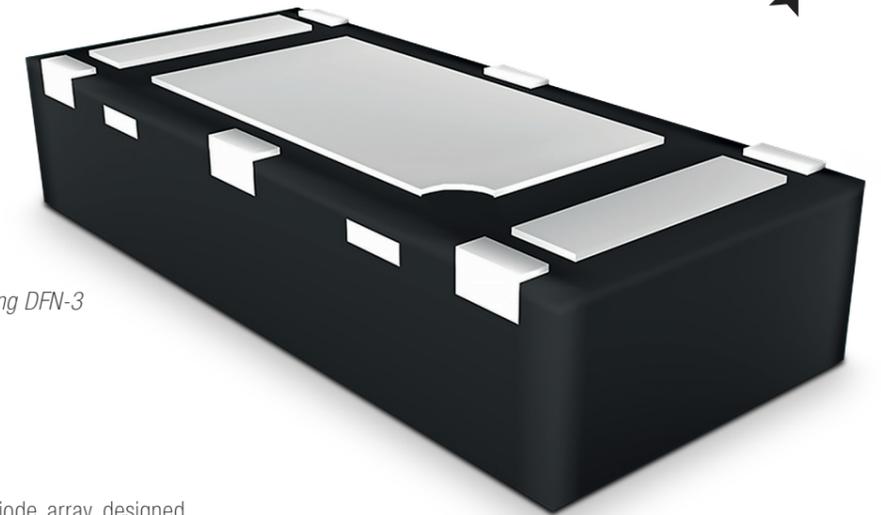

compact board space saving DFN-3 package solution

ProTek Devices has introduced a TVS diode array designed for circuit protection of proximity sensors in automated factory sensory applications. The new device features a double diode array for switch protection and reverse blocking protection.

The PDFN3-32 is designed to protect 24 volt proximity sensors for factory automation sensory applications. It is compliant with IEC standards 61000-4-2 (ESD), 61000-4-4 (EFT), 61000-4-5 (surge) and IEC 61131-2 (interfaces with logic input types 1, 2, 3). This transient voltage suppressor diode array's minimum breakdown voltage (VBR) is 34V and maximum clamping voltage is 55V at 25A, 8/20 micro seconds. The blocking diode drop forward voltage (VF) is 1.1V at 300mA and the blocking diode maximum 10ms square pulse current (IFSM) is 3A. The ambient operating temperature is -40 degrees Celsius to 100 degrees Celsius. The PDFN3-32 is also RoHS and REACH compliant.

Now available, the PDFN3-32 is an ideal solution where board space is at a premium, as it is provided in a molded DFN-3 package.

Other key mechanical characteristics include lead-free plating and a solder reflow temperature of 260-270 degrees Celsius. The device's flammability rating is UL 94V-0. It is delivered on 8mm tape and reel, per EIA standard 481, in minimum quantities of 3,000.

### FEATURES

- Compatible with:
  - IEC 61000-4-2 (ESD): Air ±15 kV, Contact ±8 kV
  - IEC 61000-4-4 (EFT): 40A - 5/50ns
  - IEC 61000-4-5 (Surge): 40A, 8/20µs
- IEC61132-2 (Interfaces with Logic Input Type 1,2,3)
- 2800 Watts Peak Pulse Power (tp = 8 / 20 µs)
- ESD Protection +/- 30 kilovolts
- Clamping Voltage: VC Max 70V @ 40A, 8 / 20 µs
- REACH & RoHS Compliant

### APPLICATIONS

- Factory Automation Sensors
- Proximity Sensor Interfaces

## DIELECTRIC FILTER LINE UP FOR 5G



5G, the fifth and next generation telecommunication standard for cellular mobile communications, will change the world!

It succeeds the 4G (LTE/WiMax), 3G (UMTS) and 2G (GSM) systems and coming soon, companies already started with field tests. 5G improves data rate, reduce cost, save energy and due higher system capacity increase massive device connectivity compared to the former systems. The new 5G radio operate in lower frequencies range around 600 MHz up to 6 GHz.

TaiSaw Technology is well prepared to support the market with suitable products. A dedicated new product line of Dielectric Filter (DR filter) offer high frequency filter for networking, automotive, industry applications which will use 5G in the next generation of products

DR filter mainly focus on higher frequency band as higher frequency can integrate more data. People consider DR is old tech but ceramic is changing, advancing every day, every year.

TST produce a full line if have DR filter. 2.4GHz, 3G, and all the way up to 6GHz for high power application. Small radio cell for certain application need higher power. The more cells, the more data can spread into the network. Making it usable for gaming, self-driving cars, and smart cities, for instance. In cities, the millimeter-wave network will be super fast. 5G will become the most important radio standard for industrial uses, e.g. industrial robots.

The first generation of driverless cars will be self-contained, but future generations interact with other cars (C2C) and smart roads to improve safety and managing the traffic.

Beside the standard Dielectric Filters TST can provide customize DR filter as well a wide range on SAW filter, TC SAW, BAW Filter and suitable high end oscillator. Timing and filtering products used in wireless device, mobile device and any radio application.

## DIELECTRIC FILTER LINE UP FOR 5G

	TST PIN	TYPE	CENTER FREQUENCY	PASS BAND	BANDWIDTH	INSERTION LOSS (MAX)	ATTENUATION	SIZE	APPLICATION
<b>DIELECTRIC FILTER</b>									
TR0001A	DR		3625 MHz	3550 ~ 3700 MHz	150 MHz	3.0 dB	25 dB @3340-3450M	26 x 11.5 mm	LTE Band 48
TR0003A	DR		3500 MHz	3400 ~ 3600 MHz	200 MHz	2.5 dB	8 dB @3320&3680M	4.5 x 3.8 mm	LTE Band 42
TR0004A	DR		3500 MHz	3400 ~ 3600 MHz	200 MHz	2.0 dB	25 dB @3320&3680M	15.9 x 6.2 mm	LTE Band 42
TR0005A	DR		3700 MHz	3600 ~ 3800 MHz	200 MHz	2.5 dB	8 dB @3520&3880M	4.5 x 3.8 mm	LTE Band 43
TR0006A	DR		3700 MHz	3600 ~ 3800 MHz	200 MHz	2.0 dB	25 dB @3520&3880M	15.9 x 6.2 mm	LTE Band 43
TR0008A	DR		5240 MHz	5140 ~ 5340 MHz	200 MHz	2.1 dB	19 dB @5480-5860M	3.25 x 2.58 mm	5G Wi-Fi
TR0012A	DR		5670 MHz	5480 ~ 5860 MHz	380 MHz	2.1 dB	19 dB @5150-5340M	3.25 x 2.58 mm	5G Wi-Fi
TR0009A	DR		5245 MHz	5150 ~ 5340 MHz	190 MHz	2.0 dB	30 dB @5480-5850M	8.05 x 4.05 mm	5G Wi-Fi
TR0011A	DR		5665 MHz	5480 ~ 5850 MHz	370 MHz	2.0 dB	35 dB @5150-5340M	8.05 x 3.45 mm	5G Wi-Fi
TR0010A	DR		5250 MHz	5170 ~ 5330 MHz	160 MHz	2.5 dB	40 dB @5490-5935M	8.05 x 4.05 mm	5G Wi-Fi
TR0013A	DR		5710 MHz	5490 ~ 5935 MHz	445 MHz	2.5 dB	40 dB @5170-5330M	8.05 x 3.45 mm	5G Wi-Fi
TR0007B	DR		5235 MHz	5150 ~ 5330 MHz	180 MHz	2.5 dB @5150-5320 3.5 dB @5360	50 dB @5490-5850M	8.6 x 4.05 mm	5G Wi-Fi
TR0014B	DR		5697 MHz	5490 ~ 5850 MHz	360 MHz	2.5 dB	50 dB @5150-5330M	8.6 x 3.45 mm	5G Wi-Fi
TR0015A	DR		1975 MHz	1840 ~ 2110 MHz	270 MHz	1.0 dB	35 dB @1725&2225M	26 x 11.5 mm	V-set
TR0002A	DR		5825 MHz	5725 ~ 5925 MHz	200 MHz	2.0 dB	35 dB @4995M	4.4 x 3.9 mm	V2X
<b>LTCC FILTER</b>									
TL0001A	LTCC		3550 MHz	3300 ~ 3800 MHz	500 MHz	0.9 dB	25 dB @2600M	1.6 x 0.8 mm	LTE Band 42/43
TL0002A	LTCC		3500 MHz	3300 ~ 3800 MHz	500 MHz	0.6 dB	35 dB @6600-7600M 35 dB @9900-11400M	1.6 x 0.8 mm	LTE Band 42/43
TL0003A	LTCC		2450 MHz	2300 ~ 2600 MHz	300 MHz	1.0 dB	27 dB @4600-5200M 25 dB @6900-7800M	1.0 x 0.5 mm	LTE, IoT
TL0004A	LTCC		1845 MHz	1710 ~ 1980 MHz	270 MHz	1.0 dB	30 dB @3420-3960M 25 dB @5130-5940M	1.0 x 0.5 mm	LTE, IoT
TL0005A	LTCC		824 MHz	699 ~ 849 MHz	250 MHz	1.2 dB	21 dB @1400-1559M	1.0 x 0.5 mm	LTE, IoT
TL0006A	LTCC		807 MHz	699 ~ 915 MHz	216 MHz	1.2 dB	21 dB @1400-1559M	1.0 x 0.5 mm	LTE, IoT
TL0007A	LTCC		2247.5 MHz	1805 ~ 2690 MHz	885 MHz	1.5 dB	15 dB @600-900M	2.0 x 1.25 mm	LTE, IoT
TL0008A	LTCC		2002.5 MHz	1805 ~ 2200 MHz	395 MHz	1.8 dB	10 dB @2705-3300M	1.4 x 1.1 mm	LTE, IoT
TL0009A	LTCC		2450 MHz	2400 ~ 2500 MHz	100 MHz	1.7 dB	25 dB @1850-1910M 25 dB @4800-5000M	1.6 x 0.8 mm	Bluetooth, Wireless LAN
TL0015A	LTCC		829.5 MHz	699 ~ 960 MHz	261 MHz	0.7 dB	25 dB @1427-1920M 25 dB @2097-2880M	1.6 x 0.8 mm	NB-IoT
TL0016A	LTCC		1850 MHz	1710 ~ 1990 MHz	280 MHz	0.6 dB	30 dB @3420-3980M	1.6 x 0.8 mm	NB-IoT
TL0017A	LTCC		2.4/5.5G	2400 ~ 2500 MHz 5150 ~ 5850 MHz	100/700 MHz	0.6 dB @2400-2500 1.5 dB @5150-5850	25 dB @4800-5000M 25 dB @2380M	1.6 x 0.8 mm	2.4G/5G Wi-Fi
TL0010A	LTCC		2450 MHz	2400 ~ 2500 MHz	100 MHz	2.5 dB	27 dB @880-900M 34 dB @4800-5000M	1.6 x 0.8 mm	2.4G Wi-Fi
TL0011A	LTCC		5410 MHz	4900 ~ 5920 MHz	1050 MHz	2.0 dB	30 dB @3500M	2.0 x 1.25 mm	5G Wi-Fi

# SMT RADIO MODUL, UNI DIRECTIONAL COMMUNICATION FOR ISM BAND FREQUENCY 433 MHz

AUREL S-p-A produce a full line of standard RF solution on free-license frequencies in 433 MHz, 868 MHz and 2.4 GHz compliant with the european normative is available. With more than fifty years of expertise in the design, industrialization, production of wireless radio solutions.

For uni directional communication using the ISM Band frequency 433 MHz, Aurel release a new line of SMD ASK receiver and transmitter. Optional the transmitters are using an integrated loop antenna. Ideal to be integrated in key fobs, small hardware and portable devices. Typically used in short range communication up to 100 m distance.

## APPLICATIONS

- Security alarm system
- Tubular motor control
- Cooking hoods
- Heating system control
- Gate / garage opener
- Automatic driver recognition system
- Street lighting
- Tarpaulin systems

## SMT RADIO MODULS

HAVE A LOOK



TX-434-SMALL  
P.N. 650201459G

SMT 433 MHz ASK transmitter for external antenna connection, operating at 433.92 MHz.

HAVE A LOOK

TX.42-SMALL  
P.N. 650201465G

SMT 433.42 MHz ASK transmitter for external antenna connection, operating at 433.42 MHz.

HAVE A LOOK



TX-434-SMALL-IA  
P.N. 650201460G

SMT 433 MHz ASK transmitter with integrated antenna, operating at 433.92 MHz

HAVE A LOOK

TX.42-SMALL-IA  
P.N. 650201466G

SMT 433.42 MHz ASK transmitter with integrated antenna, operating at 433.42 MHz.

HAVE A LOOK



RX-4MR50-SMD  
P.N. 650201464G

Band pass filtered Super Het OOK Receiver, 433.92 MHz, RED compliant (Radio Equipment Directive 2014/53/EU), and in particular with harmonics standards: EN 301 489-3 : V2.1.1 (final draft), EN 300 220-2 : V3.1.1  
The low cost SMT OOK receiver with band pass filter, ESD antenna protection in compliance with EN61000-4-2.

Contact for information: Mr. Gensler · Phone: +49(0)7452-6007-31 · e-mail: a.gensler@endrich.com

## HEADQUARTERS

ENDRICH Bauelemente Vertriebs GmbH  
P.O.Box 1251 · 72192 Nagold, Germany  
T +49 (0) 7452 6007-0  
F +49 (0) 7452 6007-70  
endrich@endrich.com  
www.endrich.com

## SALES OFFICES IN EUROPE

**France**  
Paris:  
T +33/186653215  
france@endrich.com

Lyon:  
T +33/186653215  
france2@endrich.com

**Spain**  
Barcelona:  
T +34/93 217 31 44  
spain@endrich.com

**Bulgaria**  
Sofia:  
bulgaria@endrich.com

**Austria & Slovenia**  
Brunn am Gebirge:  
T +43/1 665 25 25  
austria@endrich.com

**Romania**  
Timisoara:  
romania@endrich.com

**Hungary**  
Budapest:  
T +361/2 97 41 91  
hungary@endrich.com

**Switzerland – Novitronic**  
Zurich:  
T +41/44 306 91 91  
info@novitronic.ch