


定電流二極體

CRD(Current Regulative Diode)

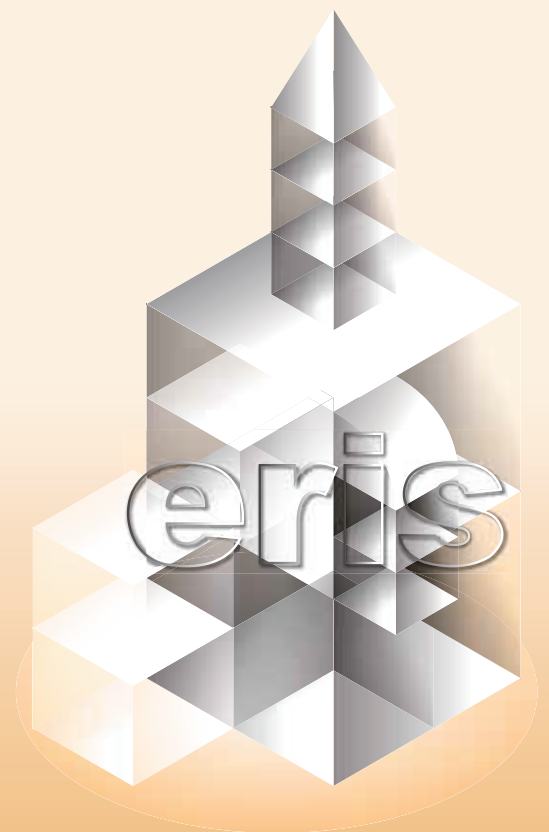

Current Regulative Diode


| Part Number | Pinch-off Current | | Limiting Current | Maximum Load Voltage | Power Dissipation | Marking Code |
|-------------|-------------------|-----|---------------------|----------------------|-------------------|--------------|
| | $I_P @ V=20V$ | | $V_K @ 0.8I_{Pmin}$ | $V_B @ 1.1I_{Pmax}$ | P_D | |
| | Min | Max | Max | Max | Max | |
| | mA | mA | V | A | W | |

CRD (Current Regulative Diode)

20 - 80 mAmpere / DO-214AC (SMA)

NEW

| | | | | | | |
|----------|----|------|-----|-------|-----|---------|
| ECRD020A | 16 | 24.0 | 3.5 | 190.0 | 1.2 | CRD020A |
| ECRD040A | 36 | 44.0 | 6.0 | 190.0 | 1.2 | CRD040A |
| ECRD060A | 54 | 66.0 | 7.0 | 190.0 | 1.2 | CRD060A |
| ECRD080A | 72 | 88.0 | 8.0 | 190.0 | 1.2 | CRD080A |



20 - 80 mAmpere / DO-214AA (SMB)

NEW

| | | | | | | |
|----------|----|------|-----|-------|-----|---------|
| ECRD020B | 16 | 24.0 | 3.5 | 190.0 | 1.2 | CRD020B |
| ECRD040B | 36 | 44.0 | 6.0 | 190.0 | 1.2 | CRD040B |
| ECRD060B | 54 | 66.0 | 7.0 | 190.0 | 1.2 | CRD060B |
| ECRD080B | 72 | 88.0 | 8.0 | 190.0 | 1.2 | CRD080B |

